
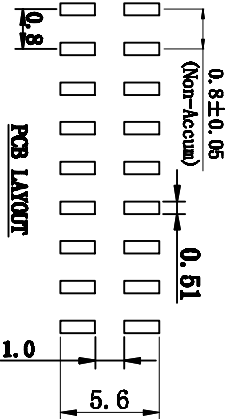

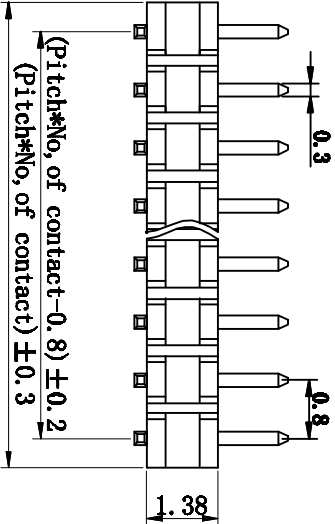


REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	ZQJ 11/18/2014	~	ZQJ 11/18/2014
B	ADD P/N CODE	CJJ 11/18/2014	~	

SPECIFICATIONS

Current Rating: 0.75amps
Insulator resistance: 500 Megohms min.
Dielectric Withstanding: AC 500V
Operating Temperature: -40 °TO +105°C
Contact Material: Phosphor Bronze
Plating: Gold Flash
Insulator Material: NYLON-67

UNSPECIFIED TOLERANCE: ±0.20

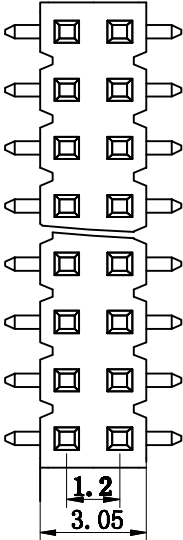

				GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION				TITLE		0.8MM 2*40PIN HEADER SMT																																																			
				X, .X, .XX		±0.60 ±0.38 ±0.25		X, .X, .XX		±5° ±3° ±2°		UNITS		mm																																																			
												SHEET SIZE		A4																																																			
												SERIES		LL1013-6 SMT																																																			
慈溪蓝翎电子有限公司																																																																	
CIXI LANLING ELECTRONICS CO.,LTD.																																																																	
宣德电子																																																																	
1						2						3						4						5						6						7						8																							
2						CONTACT												COPPER ALLOY						GOLD OR TIN PLATED						DRAWING TYPE						CUSTOMER						SCALE						1:1						SHEET						1 OF 1					
1						HOUSING												THERMOPLASTIC						UL 94 V-0																																									
ITEM						PART NAME						PART NO.						MATERIALS						FINISHED						DRAWING NO.																																			