


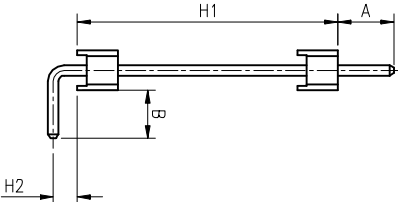


REV	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	ZQJ 11/18/2014	~	ZQJ 11/18/2014
B	ADD P/N CODE	CJJ 11/18/2014	~	

- NOTES:
- MATERIAL
 - INSULATOR:THERMOPLASTIC(U94 V-0).
 - CONTACT MATERIAL:COPPER ALLOY.
 - SPECIFICATION
 - CURRENT RATING:1.5 Amp.
 - INSULATION RESISTANCE:1000MΩ Min.
 - DIELECTRIC WITHSTANDING:600VAC.
 - CONTACT RESISTANCE:50mΩ Max.
 - OPERATING TEMPERATURE:-40°C TO+105°C.

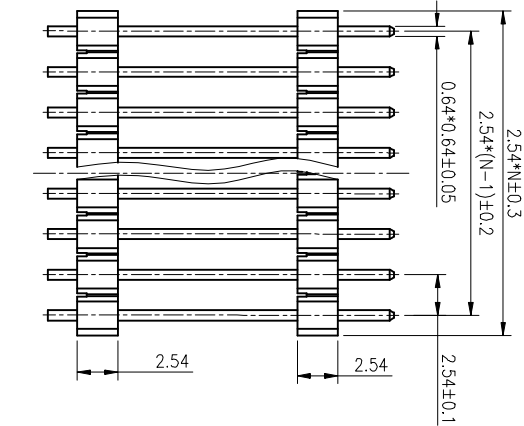

RECOMMEND PCB LAYOUT(TOLERANCE=±0.05)

TYPE	DIM A	DIM B	DIM H1	DIM H2	PIN LENGTH
1	3.50	3.00	16.33	1.50	25.10
2	3.50	3.00	6.33	1.50	15.10
3					
4					
5					
6					
7					
8					
9					
10					
11					
12					

GENERAL TOLERANCE		ANGLE TOLERANCE	
X, .X, .XX	±0.60 ±0.38 ±0.25	X, .X, .XX	±5° ±3° ±2°
DRAWING TYPE	CUSTOMER		
SCALE	1:1	SHEET	1 OF 1
DRAWING NO.			

PROJECTION		TITLE	
UNITS			
SHEET SIZE	A4	SERIES	LL1012A-01C

慈溪蓝翎电子有限公司			
CIXI LANLING ELECTRONICS CO., LTD.			

2.54mm PITCH PIN HEADER			
SINGLE ROW RIGHT ANGLE			