

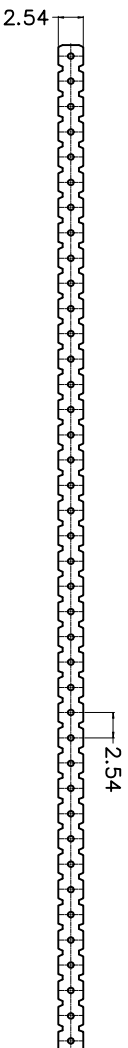


REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	ZQJ 11/18/2014	~	ZQJ 11/18/2014
B	ADD P/N CODE	CJJ 11/18/2014	~	

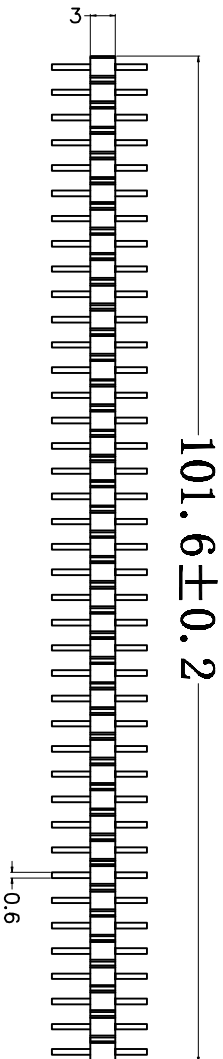

NOTES:

- ELECTRICAL CHARACTERISTICS:
 - CONTACT RESISTANCE: 20mΩ Max.
 - DIELECTRIC WITHSTANDING VOLTAGE: 500V AC(mms) FOR 1 MINUTE.
 - INSULATION RESISTANCE: 1000MΩ Min.
- ENVIRONMENT CHARACTERISTICS:
 - TEMPERATURE: -40°C~+105°C.

GENERAL TOLERANCE	ANGLE TOLERANCE
X. ±0.60	X. ±5°
.X ±0.38	.X ±3°
.XX ±0.25	.XX ±2°

PROJECTION UNITS	TITLE
mm	2.54MM ROUND PIN HEADER
SHEET SIZE	SHEET
A4	1 OF 1
SHEET SIZE	SERIES
A4	LL1009-1E

ITEM	PART NAME	PART NO.	MATERIALS	FINISHED	DRAWING NO.
2	CONTACT		COPPER ALLOY	GOLD OR TIN PLATED	
1	HOUSING		THERMOPLASTIC	UL 94 V-0	

DRAWING TYPE	CUSTOMER	SHEET	1 OF 1
SCALE	1:1	SHEET	1 OF 1
DRAWING NO.			


慈溪蓝翎电子有限公司
 CIXI LANLING ELECTRONICS CO., LTD.