


REV	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	ZQJ 11/18/2014	~	ZQJ 11/18/2014
B	ADD P/N CODE	CJJ 11/18/2014	~	

NOTES:

- ELECTRICAL CHARACTERISTICS:
  - CONTACT RESISTANCE: 30mΩ Max. INITIAL.
  - DIELECTRIC WITHSTANDING VOLTAGE: 500V AC(rms) FOR 1 MINUTE.
  - INSULATION RESISTANCE: 1000MΩ Min.
- ENVIRONMENT CHARACTERISTICS:
  - TEMPERATURE RANGE: -40°C~+105°C.

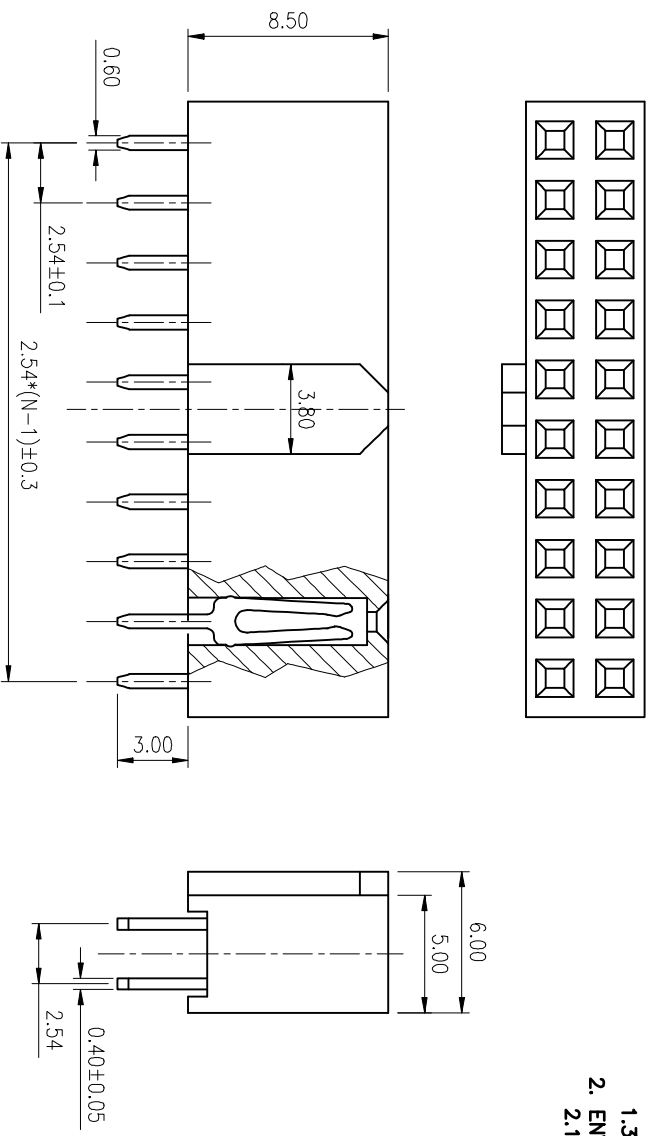

DUAL ROWS  
N:NUMBER OF CONTACTS/2

GENERAL TOLERANCE		ANGLE	TOLERANCE	PROJECTION	TITLE
X.	±0.60		X.	±5°	FEMALE HEADER PITCH 2.54mm w/ POLARIZATION
X	±0.38		X	±3°	
.XX	±0.25		.XX	±2°	
DRAWING TYPE		CUSTOMER		SHEET	1 OF 1
SCALE		1:1			
DRAWING NO.					

慈溪蓝翎电子有限公司  
CIXI LANLING ELECTRONICS CO., LTD.