



REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	ZQJ 11/18/2014	~	ZQJ 11/18/2014
B	ADD P/N CODE	CJJ 11/18/2014	~	

N: NUMBER OF CONTACTS/2
B: CUSTOMER LENGTH AVAILABLE

NOTES:

1. ELECTRICAL CHARACTERISTICS:
- 1.1 CONTACT RESISTANCE: 20mΩ Max. INITIAL.
1.2 DIELECTRIC WITHSTANDING VOLTAGE: 500V AC(rms)
FOR 1 MINUTE.
1.3 INSULATION RESISTANCE: 1000MΩ Min.
2. ENVIRONMENT CHARACTERISTICS:
- 2.1 TEMPERATURE: -40°C~+105°C.

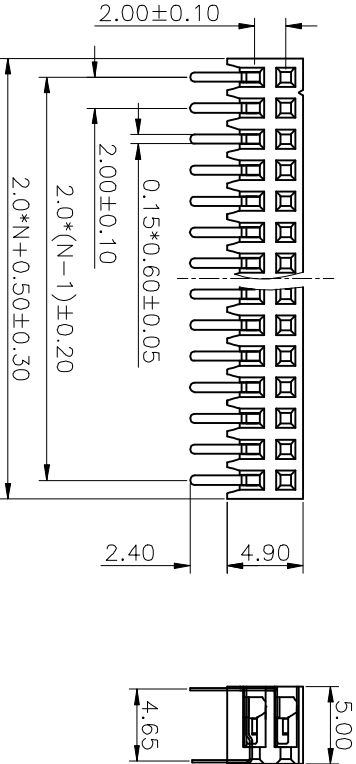

GENERAL TOLERANCE		ANGLE	TOLERANCE	PROJECTION		TITLE		SIDE ENTRY RIGHT ANGLE		
X.	±0.60		±5°	UNITS	mm					
.X	±0.38		±3°	SHEET SIZE	A4	SERIES	LL1017-7			
.XX	±0.25		±2°							
DRAWING TYPE		CUSTOMER								
SCALE		1:1	SHEET							1 OF 1
DRAWING NO.										

慈溪蓝翎电子有限公司

CIXI LANLING ELECTRONICS CO., LTD.

蓝翎电子

慈溪蓝翎电子有限公司
CIXI LANLING ELECTRONICS CO., LTD.