




REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	ZQJ 11/18/2014	~	ZQJ 11/18/2014
B	ADD P/N CODE	CJJ 11/18/2014	~	

SPECIFICATIONS

Current Rating: 3amps
Insulator Resistance: 1000M Ω min.
Dielectric Withstanding: AC 500v
Operating Temperature: -40°C ~ +105°C
Contact Material: Brass
Insulator Material: PA6T
Finish: Gold Flash
UNSPECIFIED TOLERANCE: ± 0.20

Dimensions list

Contacts Per row	Dimensions		Contacts Per row	Dimensions	
	A	B		A	B
1	2.0	0	21	42.0	40.0
2	4.0	2.0	22	44.0	42.0
3	6.0	4.0	23	46.0	44.0
4	7.7	6.0	24	48.0	46.0
5	10.0	8.0	25	50.0	48.0
6	12.0	10.0	26	52.0	50.0
7	14.0	12.0	27	54.0	54.0
8	16.0	14.0	28	56.0	
9	18.0	16.0	29	58.0	56.0
10	20.0	18.0	30	60.0	58.0
11	22.0	20.0	31	62.0	60.0
12	24.0	22.0	32	64.0	62.0
13	26.0	24.0	33	66.0	64.0
14	28.0	26.0	34	68.0	66.0
15	30.0	28.0	35	70.0	68.0
16	32.0	30.0	36	72.0	70.0
17	34.0	32.0	37	74.0	72.0
18	36.0	34.0	38	76.0	74.0
19	38.0	36.0	39	78.0	76.0
20	40.0	38.0	40	80.0	78.0

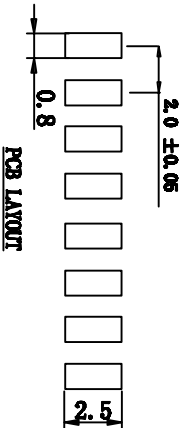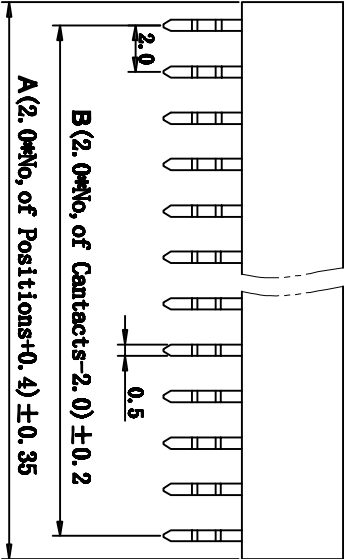

GENERAL TOLERANCE		ANGLE TOLERANCE	
X.	± 0.60	X.	$\pm 5^\circ$
.X	± 0.38	.X	$\pm 3^\circ$
.XX	± 0.25	.XX	$\pm 2^\circ$
PROJECTION		TITLE	
UNITS	mm	2.0mm 1*40pin female header horizontal side smt	
SHEET SIZE	A4	SERIES	LL1017-2C
慈溪蓝翎电子有限公司 CIXI LANLING ELECTRONICS CO., LTD.			
ITEM	PART NAME	PART NO.	DRAWING NO.
1	HOUSING	THERMOPLASTIC	SCALE
2	CONTACT	COPPER ALLOY	DRAWING TYPE
		GOLD OR TIN PLATED	CUSTOMER
		UL 94 V-0	1:1
		FINISHED	SHEET
			1 OF 1