
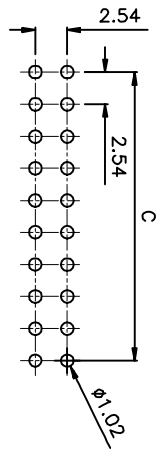
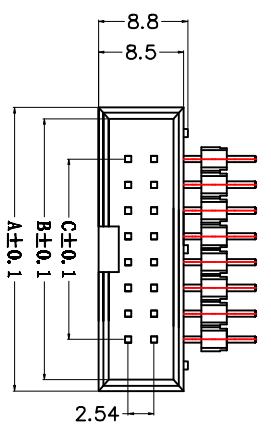


REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	ZQJ 11/18/2014	~	ZQJ 11/18/2014
B		CJJ 11/18/2014	~	ZQJ 11/18/2014
C		CJJ 11/18/2014	~	

NOTES:


- ELECTRICAL CHARACTERISTICS:
  - CONTACT RESISTANCE: 20mΩ Max. INITIAL
  - DIELECTRIC WITHSTANDING VOLTAGE: 500V AC(rms) FOR 1 MINUTE.
  - INSULATION RESISTANCE: 1000MΩ Min.
- ENVIRONMENT CHARACTERISTICS:
 

TEMPERATURE RANGE: -40°C~+105°C.
- PRODUCT NUMBER CODE:  
LL1007 - X X X X X X - X - X

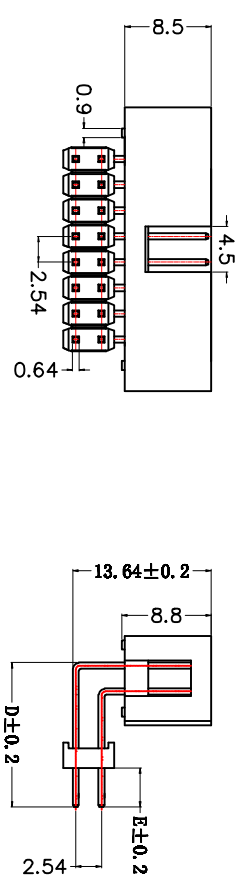

RECOMMEND PCB LAYOUT(TOLERANCE=±0.05)

Position	A	B	C
6P	15.2	13	5.08
8P	17.6	15.4	7.62
10P	20.3	18.1	10.16
12P	22.8	20.6	12.7
14P	25.3	23.1	15.24
16P	27.9	25.7	17.78
18P	30.5	28.3	20.32
20P	33	30.8	22.86
24P	38	35.8	27.94
26P	40.6	38.4	30.48
30P	45.6	43.4	35.56
34P	50.7	48.5	40.64
40P	58.4	56.2	48.26
50P	71	68.8	60.96
60P	84.1	81.9	73.66
64P	89.2	87	78.74

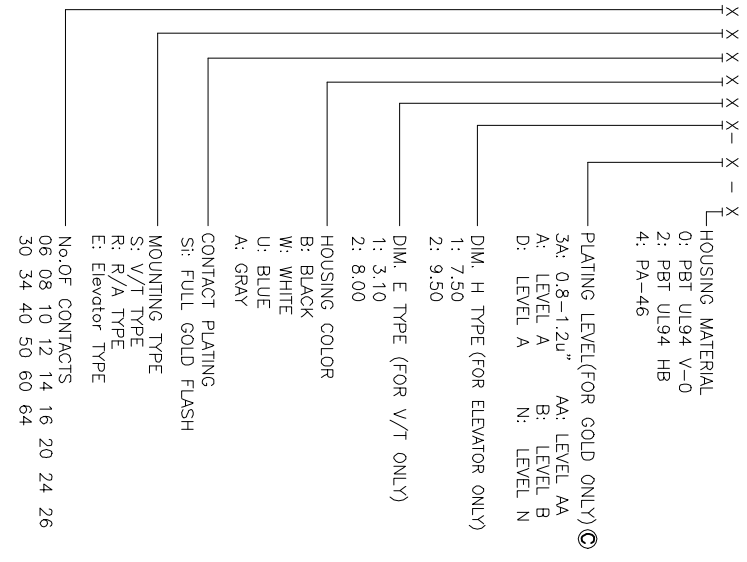

GENERAL TOLERANCE	ANGLE	TOLERANCE
X, ±0.60	X, ±5°	
.X, ±0.38	.X, ±3°	
.XX, ±0.25	.XX, ±2°	

DRAWING TYPE	CUSTOMER	SHEET	1 OF 1
SCALE	1:1		
DRAWING NO.			

PROJECTION UNITS: mm

SHEET SIZE: A4

TITLE: BOX HEADER R/A

ADD PLASTIC PITCH 2.54mm

SERIES: LL1007-6

慈溪蓝翎电子有限公司  
CIXI LANLING ELECTRONICS CO., LTD.  
Tel: 86-574-638519036 Fax: 86-574-63817070