


| REV. | DESCRIPTION | DRAWN | CHECKED    | APPROVED |
|------|-------------|-------|------------|----------|
| A    | NEW RELEASE | CJU   | 11/18/2014 |          |
|      |             |       |            |          |
|      |             |       |            |          |

NOTES:

- ELECTRICAL CHARACTERISTICS:
  - 1.1 CONTACT RESISTANCE: 30mΩ Max.
  - 1.2 DIELECTRIC WITHSTANDING VOLTAGE: 500V AC(rms) FOR 1 MINUTE.
  - 1.3 INSULATION RESISTANCE: 1000MΩ Min.
- ENVIRONMENT CHARACTERISTICS:
  - 2.1 TEMPERATURE RANGE: -40°C~+105°C.

3. PRODUCT NUMBER CODE:

- LL1034-3 - X X X X X X
- HOUSING COLOR
    - A:GRAY
    - B:BLACK
    - L:BLUE
  - CONTACT PLATING
    - 2:NICKEL + GOLD FLASH
    - 6:FULL TIN
    - 8:FULL GOLD FLASH
  - POLARIZATION SUPPORT
    - A:W/
    - B:W/O
  - No. OF CONTACTS
    - 10 20 26 30
    - 34 40 50 60
    - 68 70 80 90
    - 100

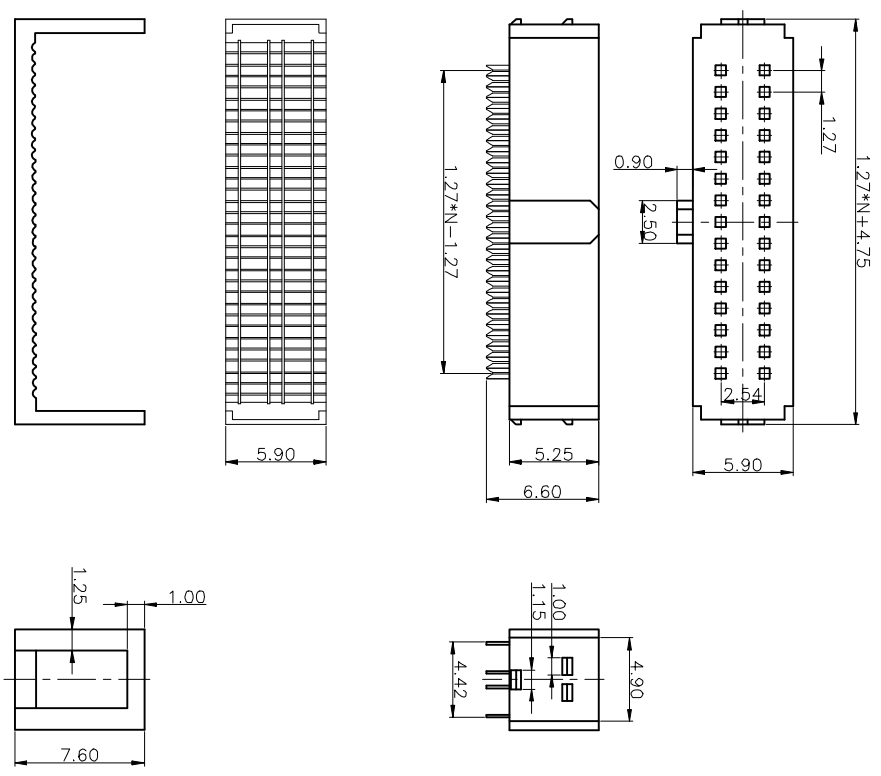

|   |   |   |   |   |   |   |   |
|---|---|---|---|---|---|---|---|
| 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 |
| H | G | F | E | D | C | B | A |
| 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 |
| H | G | F | E | D | C | B | A |

| GENERAL TOLERANCE | ANGLE TOLERANCE | TOLERANCE |
|-------------------|-----------------|-----------|
| X, ±0.60          | X, ±5°          | ±S        |
| .X, ±0.38         | X, ±3°          | ±3°       |
| .XX, ±0.25        | .XX, ±2°        | ±2°       |

| DRAWING TYPE | CUSTOMER | SHEET | 1 OF 1 |
|--------------|----------|-------|--------|
| SCALE        | 1:1      | SHEET | 1 OF 1 |
| DRAWING NO.  |          |       |        |

| PROJECTION    | TITLE                        |
|---------------|------------------------------|
| UNITS mm      | IDC SOCKET PITCH 1.27*2.54mm |
| SHEET SIZE A4 | SERIES LL1034-3              |

慈溪蓝翎电子有限公司  
CIXI LANLING ELECTRONICS CO., LTD.