REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	ZQJ 11/18/2014	~	ZQJ 11/18/2014
B	ADD P/N CODE	CJJ 11/18/2014		

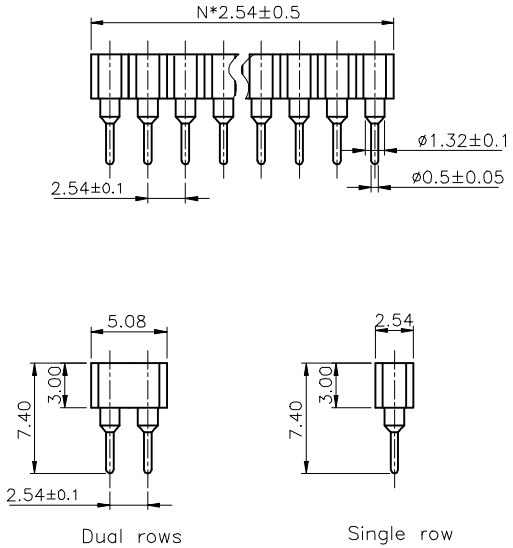

V/T TYPE

NOTES:

1. SPECIFICATIONS:
   - 1.1 CONTACT RESISTANCE: 20mΩ Max.
   - 1.2 DIELECTRIC WITHSTANDING VOLTAGE: 500V AC FOR 1 MINUTE.
   - 1.3 INSULATION RESISTANCE: 1000MΩ Min.
   - 1.4 OPERATING TEMPERATURE: −40°C~+105°C.
   - 1.5 MALE PIN RANGE: ø0.381~0.635.
   - 1.6 CURRENT RATING: 3A Per Pin Max.
2. PRODUCT NUMBER CODE:

LL1019-1A − X X X X − X

- CLIP TYPE Ⓑ
  - JK: IMPORT
  - GC: DOMESTIC
- Clip plating
  - 1: Tin 150u"
  - 2: Tin 200u"
  - 3: G/F
  - 4: Gold 3u"
  - 5: Gold 10u"
  - 6: Gold 15u"
- Pin plating
  - 1: Tin 150u"
  - 2: Tin 200u"
  - 3: G/F
  - 4: Gold 3u"
  - 5: Gold 10u"
  - 6: Gold 15u"
- Mounting type
  - V: V/T TYPE
  - R: R/A TYPE
  - S: SMT TYPE
- No. of contacts
  - 1*1 − 1*64
  - 2*1 − 2*40

GENERAL TOLERANCE		ANGLE TOLERANCE	
X.	±0.60	X.	±5°
.X	±0.38	.X	±3°
.XX	±0.25	.XX	±2°

DRAWING TYPE	CUSTOMER		
SCALE	1:1	SHEET	1OF1
DRAWING NO.			

PROJECTION	⊕	TITLE	2.54mm IC SOCKET(Machine Pin) V/T Type
UNITS	mm		
SHEET SIZE	A4	SERIES	LL1019-1A

慈溪蓝翎电子有限公司
CIXI LANLING ELECTRONICS CO.,LTD.
Tel: 86-574-63519036 Fax: 86-574-63517070