



REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	ZQJ 11/18/2014	~	ZQJ 11/18/2014
B	ADD P/N CODE	CJJ 11/18/2014	~	

Material **

Housing: 30KGlass filled PBT UL94V-0.
 Contacts: Phosphor Bronze.

Electrical Characteristics:

Current Rating: 5AMP.
 Insulator Resistance: 5000M Ω min. at DC 500V.
 Contact Resistance: 20m Ω max. at DC 100ma.
 Operating Temperature: -55 $^{\circ}$ C~+105 $^{\circ}$ C.

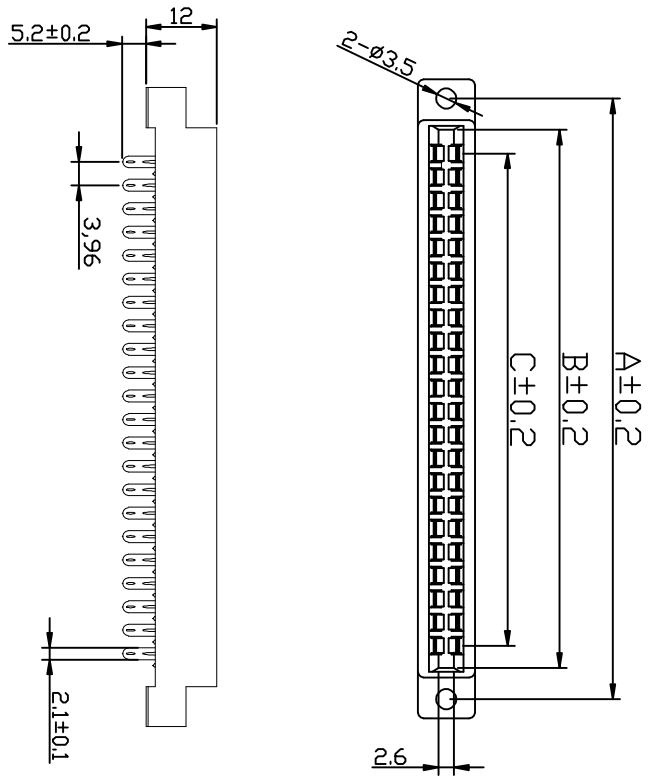

Position	A	B	C
8	30.34	20.18	11.88
12	38.26	28.1	19.8
16	46.18	36.02	27.72
20	54.1	43.94	35.64
24	62.02	51.86	43.56
30	73.9	63.74	55.44
36	85.78	75.62	67.32
44	101.62	91.46	83.16
56	125.38	115.22	106.92
72	157.06	146.9	138.6

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION		TITLE	
X, .XX	±0.60 ±0.38 ±0.25	X, .XX	±5 $^{\circ}$ ±3 $^{\circ}$ ±2 $^{\circ}$	mm	mm	EDGE CARD CONNECTOR PITCH 3.96mm	
XX		XX		A4		SERIES L.L1006-1	

ITEM	PART NAME	PART NO.	MATERIALS	FINISHED	DRAWING NO.	SHEET	1 OF 1
2	CONTACT		COPPER ALLOY				
1	HOUSING		THERMOPLASTIC				
1	PART NAME						

慈溪蓝翎电子有限公司
 CIXI LANLING ELECTRONICS CO., LTD.