

REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	ZQJ 11/18/2014		


NOTES:

- MECHANICAL
 - Operation Force: 800g Max
 - Stroke: 1.00mm
 - Temperature: -40°C~+105°C
- MATERIALS
 - Base: Engineering Plastics,Black
 - Cover: Engineering Plastics,Blacks
 - Button: Engineering Plastics,White
 - Terminal: Alloy Copper, Gold plating
- ELECTRICAL
 - Electrical Life: 2000 operations cycles per switch
 - Non-Switching Rating: 100mA,50VDC
 - Switching rating: 25mA,24VDC
 - Contact resistance: 50mΩ Max. at initial; 100mΩ Max. after life test.
 - Insulation Resistance: 100MΩ,500VDC
 - Dielectric Strength: 500VAC/1 minute
 - Circuit: Single pole single throw


4. PRODUCT NUMBER CODE:

LL1051-4 - X X X X X

- X Packing type
- B: tube
- R: tape & reel
- T: tray
- W: White
- Acuator color
- Housing color
- B: Black
- Mounting type
- S: SMT type
- V: V/T type
- No. of contacts
- 2 3 4 5 6 7
- 8 9 10 11 12

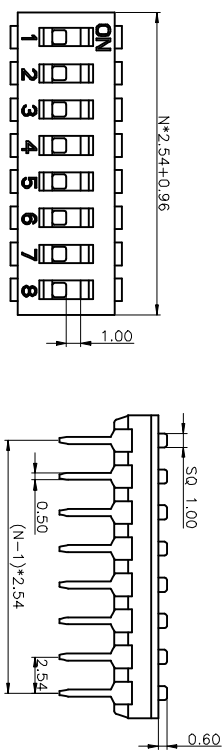

N=Number of contacts



RECOMMEND P.C.B LAYOUT
Tolerance±0.05

GENERAL TOLERANCE	ANGLE TOLERANCE	PROJECTION	UNITS
X, ±0.60	X, ±5°	mm	mm
.X, ±0.38	.X, ±3°	A4	A4
.XX, ±0.25	.XX, ±2°	SERIES	LL1051-4

DRAWING TYPE	CUSTOMER	SHEET	1 OF 1	TITLE	SWITCH PITCH	2.54mm SMT TYPE
SCALE	1:1					
DRAWING NO.						

慈溪蓝翎电子有限公司
CIXI LANLING ELECTRONICS CO., LTD.
Tel: 86-574-65519056 Fax: 86-574-65517070

