
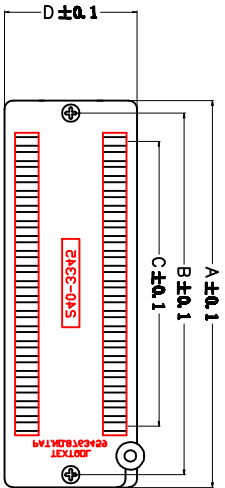


REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	ZQJ 11/18/2014	~	ZQJ 11/18/2014
B		CJJ 11/18/2014	~	ZQJ 11/18/2014
C		CJJ 11/18/2014	~	

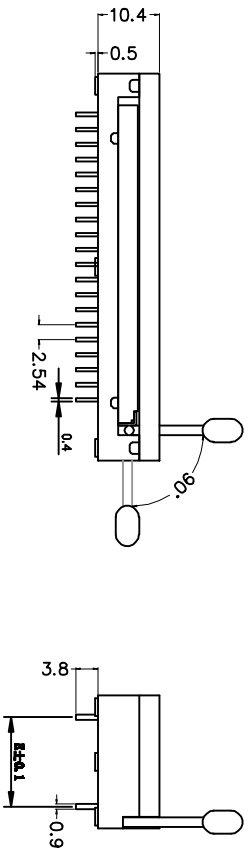

Material:  
Housing: 30% Glass filled PBT UL94-V0  
Contacts: Phosphor Bronze  
Plating: Gold plated 3µm over 50µm nickel  
Tin plated 100µm over 50µm nickel  
Electrical Characteristics:  
Current Rating: 1 AMP  
Insulator Resistance: 5000MΩ min at DC 500V  
Contact Resistance: 20mΩ max at DC 100mA  
Operating Temperature: -55°—+105°  
Features:  
For DIPs with 10µm lead spacing  
Lever actuated zero insertion force mechanism  
Socket easily disassembles for reparability  
Socket contact plating of 110 below top surface of socket.

Position	A	B	C	D	E
14P	33.2	29.2	15.24	14.9	7.62
16P	35	31	17.78	14.9	7.62
18P	38	34	20.32	14.9	7.62
20P	40.8	36.8	22.86	14.9	7.62
24P W	45.2	41.2	27.94	22.6	15.24
24P N	45.8	41.8	27.94	14.9	7.62
28P W	50.3	46.3	33.02	22.6	15.24
28P N	50.3	46.3	33.02	14.9	7.62
32P	55.3	51.3	38.1	22.6	15.24
40P	65.3	61.3	48.26	22.6	15.24
64P	100.3	95.3	78.74	32.3	22.86

GENERAL TOLERANCE	ANGLE TOLERANCE	PROJECTION UNITS	TITLE
X, ±0.60	X, ±5°	mm	2.64MM ZIP SOCKET CENTER
X, ±0.38	X, ±3°	A4	DISTANCE 7.62/16.24MM
.XX, ±0.25	.XX, ±2°	SHEET SIZE	LL1001
DRAWING TYPE CUSTOMER		SCALE	1:1
DRAWING NO.		SHEET	1 OF 1

慈溪蓝翎电子有限公司  
CIXI LANLING ELECTRONICS CO., LTD.  
Tel: 86-574-63618008 Fax: 86-574-63616770